



36watt 4pin Colour 830 Warm White



MASTER PL-L 4 Pin

MASTER PL-L 36W/830/4P 1CT

MASTER PL-L is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	2G11
Cap-Base Information	4P
Life to 50% fail	12000 hr
Preheat EL,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	83 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux Lamp EL	2900 Lm
Lumen Maintenance EL 2000h	92 %
Lumen Maintenance EL 5000h	87 %
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Lamp Wattage	36 W
Lamp Wattage EL	36 W

Lamp Voltage EL	106 V
Lamp Current EL	0.435 A

• Product Dimensions


Base Face to Base Face A	384.2 (max) mm
Insertion Length B	410 (max) mm
Overall Length C	416.6 (max) mm
Diameter D	39.0 (max) mm
Diameter D1	18.0 (max) mm

• Product Data

Order code	927863683002
Full product code	927863683002
Full product name	MASTER PL-L 36W/830/4P 1CT
Order product name	MASTER PL-L 36W/830/4P 1CT/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500706744
Bar code on outerbox - EAN3	8711500710888
Logistic code(s) - 12NC	927863683002
Net weight per piece	0.101 kg




Dimensional drawing

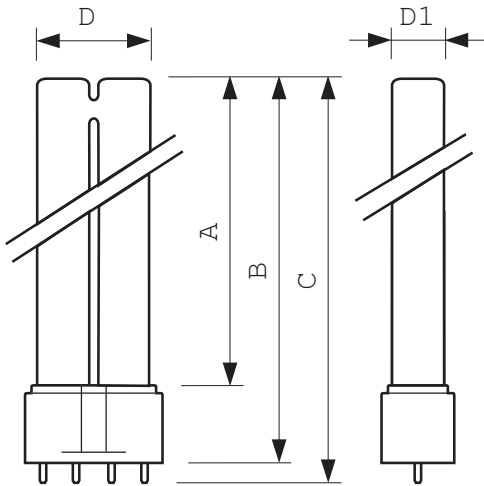

MASTER PL-L 36W/830/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-L 36W/830/4P	384.2	410	416.6	39.0	18.0



2G11

Photometric data

